


## BURGLAR ALARM CABLES - CCA

### CONSTRUCTION FEATURES

<b>Conductor</b>	Flexible coppered aluminum - CCA
<b>Insulation</b>	PVC mix
<b>Drain wire</b>	Flexible coppered aluminum - CCA
<b>Protection</b>	Strip PET cover 100%
<b>Shield</b>	Strip AL/PET cover 100%
<b>Sheath</b>	PVC mix colour white

### ELECTRICAL CHARACTERISTICS

<b>Voltage</b>	2000 V
<b>Minimum insulation resistance</b>	>20 M $\Omega$ /km
<b>Insulation grade</b>	300/500 V

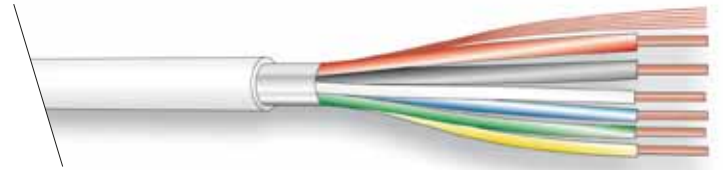

Standard packaging  
of 100 mt. in TRB  
Reference standards  
CEI UNEL 36762C-4  
(U<sub>0</sub>=400 V) - CE