


RG 58 A/U

CONSTRUCTION FEATURES

Internal conductor	19x0,18 mm CU/SN
Dielectric	PE
Dimensions Dielectric	Ø 2,95 mm
Braided Screen	CU/SN 90%
External sheath	PVC mix colour black
Ø Finished Cable	5 mm

ELECTRICAL CHARACTERISTICS

Characteristic impedance	50 ± 3 Ohm
Mutual capacity	100 pf/mt
Relative velocity of propagation	66%

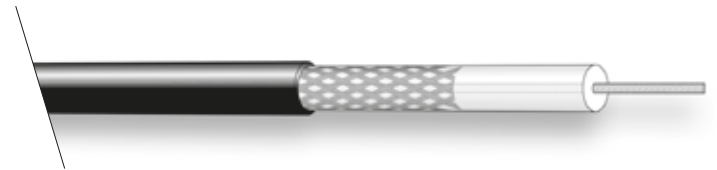

Attenuation d/b 100 mt.

50 Mhz	9,60
100 Mhz	13,60
200 Mhz	20,40
400 Mhz	30,60
800 Mhz	45,60
1050 Mhz	53,40

Standard packaging
of 100 mt. in TRB
spools of 500 mt. and 1000 mt.
Reference standards
MIL C17 F